



Wuhan Vution Lithium Power Technology Co.,Ltd

Lithium Iron Phosphate (LiFePO4) Battery

VT12.8-8

12.8V8AH 102.4Wh

Features of LiFePO4 Battery

Longer Cycle Life

LiFePO4 batteries would be is five times than SLA batteries on cycle life

High Power & Light weight

LiFePO4 batteries performance twice power of SLA batteries, while half weight helpful for transport and installation

Intelligent management control


Intelligent BMS system covered by LFP batteries to ensure that batteries work on safety and perfect condition

Lower Self-discharge rate

Lower Self-discharge rate to guarantee LFP batteries be stored more longer than SLA batteries



Physical Dimension

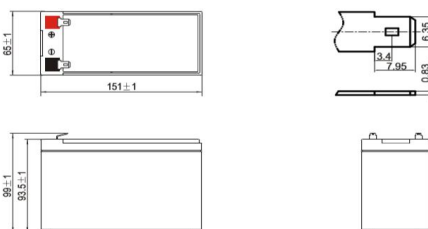

Applications

- Caravan, RV, camping
- UPS (replacement of SLA batteries)
- Marine, golf cart
- Solar, wind system
- PV ,solar light

Electrical Characteristics

Chemistry	LiFePO4
Nominal Voltage	12.8V
Nominal Capacity	8Ah (C5,25°C)
Energy	102.4Wh
Internal Resistance	≤45 mΩ
Cycle Life	>3000 cycles @1C 100%DOD
Months Self Discharge	<3%
Efficiency of Charge	100% @0.5C
Efficiency of Discharge	96-99% @1C

Standard Charge

Charge Voltage	14.6±0.2V
Charge Mode	0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV)
Charger Current	4.0A
Max. Charge Current	10A
Charge Cut-off Voltage	15.6V±0.2V

Standard Discharge

Rated Discharge Current	4A
Max Discharge Current	10A
Max. Pulse Current	24A(<3s)
Discharge Cut-off Voltage	10V
Charge Temperature	0 °C to 45 °C (32Fto 113F) @60±25% Relative Humidity
Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
Storage Temperature	0 °C to 40 °C (32Fto 104F) @60±25% Relative Humidity
Water Dust Resistance	IP65

Mechanical

BMS	4S/4P
Plastic Case	ABS
Dimensions (in./mm.)	151 x 65 x94 mm
Weight (lbs./kg.)	0.95kg(2.09 lbs)
Terminal	F2




Wuhan Vution Lithium Power Technology Co.,Ltd

Lithium Iron Phosphate (LiFePO₄) Battery


VT12.8-8

12.8V8AH 102.4Wh


Different Rate Discharge Curve(25°C)

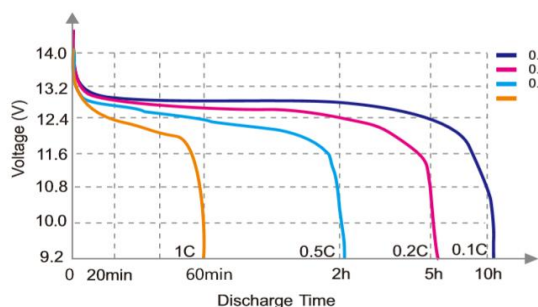


Different Temperature Discharge Curve(0.5C)

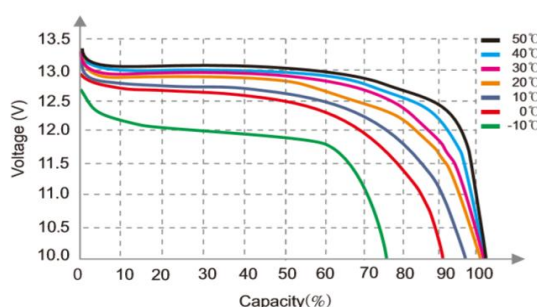


State of Charge Curve(0.5C, 25°C)

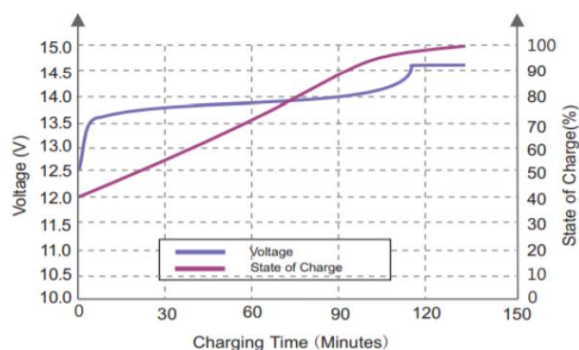


Charging Characteristics(0.5C, 25°C)

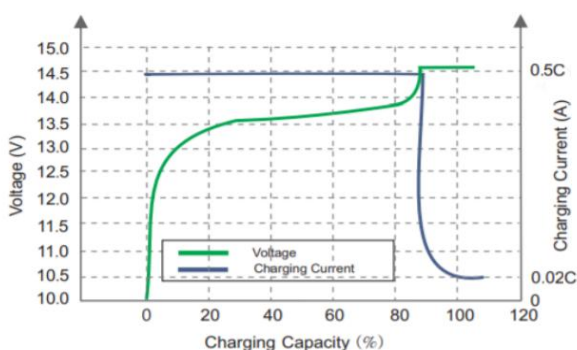

Different DOD Discharge Cycle Life Curve(1C)

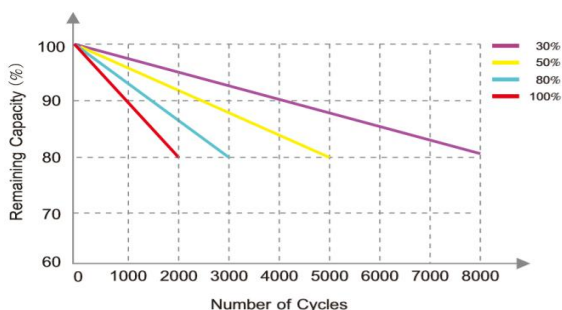

Different Temperature Self Discharge Curve

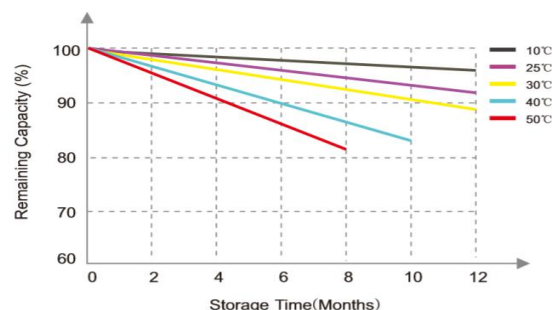

Contact info

www.vutionlithium.com

Wuhan Vution Lithium Power Technology Co.,Ltd



Tel:+86 27 5952 3598

Fax:+86 27 5952 3682

Email:jeffery@vutionlithium.com

www.vutionlithium.com

Add:24th Floor,Optics Valley Dingchuang International,Optics Valley Rare Eco Industrial Park,Wuhan,Hubei Province,China

Vution
International Sales Office