




Wuhan Vvution Lithium Power Technology Co. Ltd

Lithium ion motorcycle battery parameters

Lithium-Motorcycle

LFP5L-BS

Dimensions(mm)

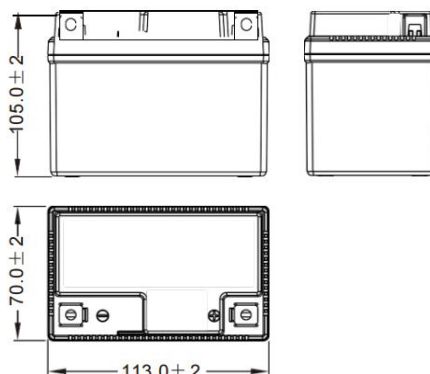

Specifications

Model	LFP5L-BS
Type	LiFePO4
Size	113*70*105mm
Weight	0.9kg
Rated voltage	12.8V
Rated Capacity	4Ah
CCA	240 CCA
Interior Resistance	13.8mΩ
Rated Charge Current	4.0A
Continuous discharge current	<40A
Instantaneous discharge current	≤240A
Over Discharge Protection Voltage	8.0V
Over Discharge Recovery Voltage	9.2V
Over Charge Protection Voltage	15.6V
Over Charge Recovery Voltage	15.2V
Equalizing voltage	3.65V * 4s
Charge discharge cycle	2000 cycles@1C,100% DOD
Self Discharge Rate	≤30uA
Adaptive temperature	-20℃~80℃
Contact info	www.vvutionlithium.com
	Tel:+86 27 5952 3598 Fax:+86 27 5952 3682 Email: jeffery@vvutionlithium.com www.vvutionlithium.com
VUTION International Sales Office	Add: 24th Floor,Optics Valley Dingchuang International,Optics Valley Rare Eco Industrial Pack,Wuhan,Hubei Province,China